



Antenna Line Configurator (ALC)

86010158

- AISG 2 / AISG 3
- HDLC-logging feature
- High-resolution display
- Wi-Fi and USB interface



ericsson.com/antenna-system

Antenna Line Configurator

Product No.	86010158	
Connector* to RCU/TMA	1 x 8-pin connector according to IEC 60130-9, female, conforming to AISG RF-connector (SMB male)	
Input voltage of ALC	24 V DC	
Display	High-resolution display, sunlight visible	
Tiltensor	Measuring range $\pm 80^\circ$, accuracy $\pm 1^\circ$	
Output voltage to RCU's/TMA's	AISG female pin 6: 24 \pm 1 V DC	RF-plug: 24 \pm 1 V DC
Output power (power supply to RCU's/TMA's)	RF-plug + AISG female pin 6 \leq 15 W	
Current monitoring measurement level	AISG female pin 6, RF-plug: 10 – 650 mA	
Over-current protection	AISG female pin 6, RF-plug: < 650 mA	
Interface to RCU/TMA	RS 485 / power supply / RF connector (SMB male)	
Protocol to RCU/TMA	HDLC hex-coded command set, conforming to 3GPP / AISG 2 and AISG 3	
Interface	W-LAN (802.11g), USB 2.0	
Max. number of RCU's/TMA's	9/1 pcs., depending on system configuration and length of control cable	
Max. length of control cable	200 m / 9 RCU's (in daisy chain configuration) 150 m / 6 RCU's (in splitter configuration)	
Internal memory	MB	512
Weight	kg lb	1 2.2
Protection class	IP 54	
Temperature range (operating)	$^\circ\text{C}$	-20 ... +45 ambient temperature
Temperature range (charging)	$^\circ\text{C}$	10 ... +40 ambient temperature
Dimensions (H x W x D)	mm in	265 x 102 x 37 10.4 x 4.0 x 1.5
Packing size	mm in	405 x 290 x 105 15.9 x 11.4 x 4.1
Power supply	LiPo-battery (16.6 V, > 1850 mAh)	

* Tightening torque for fixing the connector must be 0.5–1.0 Nm ('hand-tightened').
The connector should be tightened by hand only!

Please Note:

The user manual can be downloaded from our website: www.ericsson.com/antenna-system

Certificate:


CE
FCC
UL (for external power adapter)

Standards:

EN 60950-22
EN 62368-1
EN 62479
EN 50581
ETSI EN 301489-1
ETSI EN 301489-17
ETSI EN 300328 2.1.1

Scope of supply:

ALC
Charging device (can also be used as external power supply)
USB cable
RET cable
HF cable (SMB / 7-16)
Transport case
Screen cover

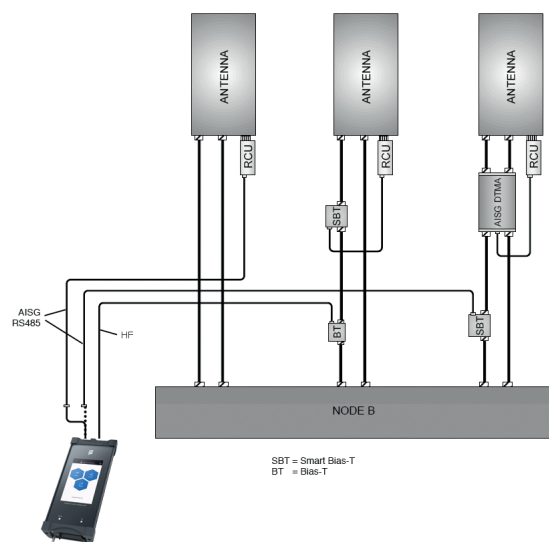

Ericsson enables communications service providers to capture the full value of connectivity. The company's portfolio spans Networks, Digital Services, Managed Services, and Emerging Business and is designed to help our customers go digital, increase efficiency and find new revenue streams. Ericsson's investments in innovation have delivered the benefits of telephony and mobile broadband to billions of people around the world. The Ericsson stock is listed on Nasdaq Stockholm and on Nasdaq New York.

Read more on www.ericsson.com